

FLYTECH

K889

21.5" Slim & Stylish Kiosk



Counter
mount



Counter
stand




Floor
stand

Features

- 21.5" widescreen display
- Transformable mounting design with wall mount / counter mount / counter stand / floor stand options
- Peripheral expansions including 2D scanner / 5MP Camera / PIN Pad* / Light Bar / Printer
- Modular design for easy maintenance

**PIN Pad bracket options only*

Features

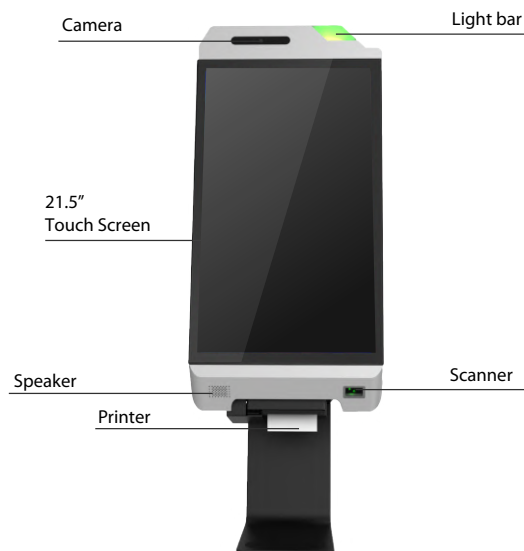

Payment terminals



Supported Verifone VX820s/P400, Ingenico IPP 350/LANE3000
(payment bracket only)

	Motherboard	F14	F84U
System	Processor Memory Storage	Qualcomm® 660 4GB LPDDR4 64GB eMMC	Intel® Tiger Lake i3-1115G4 4GB DDR4 128GB SSD (M.2)
Display	Size and Resolution Touch Screen	21.5" 1920 x 1080 True-Flat PCAP multi-touch	21.5" 1920 x 1080 True-Flat PCAP multi-touch
I/O Ports	USB Type-A USB Type-C Serial Port LAN Cash Drawer FeDP DC Jack	2x USB3.0 2x USB2.0 1x USB3.0 (data only) 2x DB9 (Powered RS232) (default: 0V; COM1/COM2: 0V, 5V, 12V) 1x RJ45 1x RJ11 2x Flytech proprietary miniDP 1x 4PIN (with latch)	2x USB3.0 2x USB2.0 2x USB3.0 (data only) 2x DB9 (Powered RS232) (default: 0V; COM1/COM2: 0V, 5V, 12V) 1x RJ45 1x RJ11 2x Flytech proprietary miniDP 1x 4PIN (with latch)
Audio	Speaker	1x 3W	1x 3W
Power	Power Supply	65W / 19V	120W / 19V
Communication	WLAN+BT	802.11 series, BT4.1 (*built-in on F14 motherboard)	802.11 series + BT4.0 (option)
Peripherals (option)	Scanner Camera Pin Pad Light Bar Printer kit Mounting Kit	2D Scanner 5MP Camera Supported Verifone VX820s/P400, Ingenico IPP 350/LANE3000 (payment bracket only) Light Bar Module Epson TM-30, Star mC-Print3 Wall mount/Counter mount/Counter stand/Floor stand	2D Scanner 5MP Camera Supported Verifone VX820s/P400, Ingenico IPP 350/LANE3000 (payment bracket only) Light Bar Module Epson TM-30, Star mC-Print3 Wall mount/Counter mount/Counter stand/Floor stand
Certificate	EMC & Safety	FCC Class A, CE Mark Class A, LVD	FCC Class A, CE Mark Class A, LVD
Environment	Operating Temperature Storage Temperature Humidity	0°C ~ 35°C (32°F ~ 95°F) -20°C ~ 60°C (-4°F ~ 140°F) 20% ~ 85% RH non-condensing	0°C ~ 35°C (32°F ~ 95°F) -20°C ~ 60°C (-4°F ~ 140°F) 20% ~ 85% RH non-condensing
Dimensions	W x H x D	310 x 820 x 300 mm (12.2" x 32.3" x 11.8")	310 x 820 x 300 mm (12.2" x 32.3" x 11.8")
Weight	Weight (w/o Accessory)	14 kg (30.86 lbs)	14 kg (30.86 lbs)
OS Supported		Android 10	Windows 10 IoT Enterprise, Linux

※ PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE ※

Taiwan - Headquarters

No.168, Sing-ai Rd., Neihu District,
Taipei City 11494, Taiwan, R.O.C.
Tel: 886-2-8791-4988
Fax: 886-2-8791-4966
E-mail: sales@flytech.com.tw
www.flytech.com

U.S.A. - California

271 East Brokaw Road, San Jose,
CA 95112, U.S.A.
Tel: 1-510-257-5180
Fax: 1-510-257-5181
E-mail: sales@flytech.com

China - Shanghai

3F Building 39, No. 333 Qjin Jiang Rd.,
Shanghai 200233, P.R.China
Tel: 86-21-5426-1555
Fax: 86-21-5426-1001
E-mail: sales@flytech.com.cn
www.flytech.com.cn

China - Hong Kong SAR

Rm01, 6/F, Blk A, Tonic Industrial Centre,
26 Kai Cheung Road, Kowloon Bay,
Kowloon, Hong Kong.
Tel: 852-3525-5800
Fax: 852-2751-7447
E-mail: sales@flytech.com.hk

