

Flytech's new digital signage solution with HDBaseT technology is designed to push high resolution content to places over 300ft.







Anti-interference Design



High Quality Media Delivery






POH Power Management (Power over HDBaseT)

1U Server Rack Installation

# **DIMENSIONS**

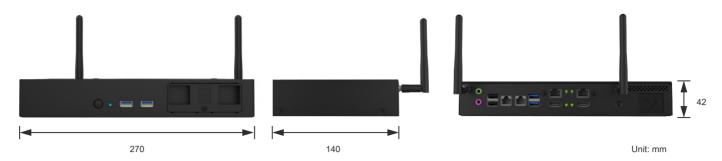

## **SPECIFICATIONS**

System	Motherboard	D97
	Processor	Intel® Apollo Lake Celeron J3455
	Graphic Engine	Intel® Graphics DX12
	Memory	4GB DDR3L
	Storage	128GB SSD (2.5" SATA slot)
	OS Supported	Windows 10 IoT Enterprise, Linux
External I/O Ports (Front Side)	Power Button	1
	Power LED Indicator	1
	USB	2x USB3.0
External I/O Ports (Rear Side)	Power Button	1
	USB	2x USB3.0
		2x USB2.0
	LAN	2x RJ45 (10/100/1000 baseT)
	Mic-in	1
	Line-out	1
	HDMI	2
	HDBaseT  * Currently only supports up to 2 displa * HDMI and HDBaseT can be switched	2 (option, HDMI Capability only- 1080p: 70m; 4K: 40m) by simultaneously with Intel Apollo Lake platform. by BIOS.
	LED Indicator	2x HDMI LED 2x HDBaseT LED (option)
Communication	Wireless LAN	802.11 series & antenna (option)
Power	Power Adapter	45W / 19V
Certificate	EMC & Safety	FCC Class A, CE Mark, LVD
Environment	Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)
	Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
	Humidity	20% ~ 85% RH non-condensing
Dimensions	Dimensions (W x D x H)	250 x 145 x 40.5 mm (9.8" x 5.7" x 1.6")
Diffictions		
Mounting	VESA Mount	75 x 75, 100 x 100

\* PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE \*

## Taiwan - Headquarters

- M No.168, Sing-ai Rd., Neihu District,
  Taipei City 11494, Taiwan, R.O.C.

   886-2-8791-4988

   886-2-8791-4966

   sales@flytech.com.tw
  www.flytech.com

#### U.S.A. - California

- ② 271 East Brokaw Road, San Jose, CA 95112, U.S.A. ③ 1-510-257-5180 ③ 1-510-257-5181 ☑ sales@flytech.com

## China - Shanghai

#### **China - Hong Kong SAR**

- Rm01, 6/F, Blk A, Tonic Industrial Centre, 26 Kai Cheung Road, Kowloon Bay, Kowloon, Hong Kong. 852-3525-5800
- 852-2751-7447

