

FLYTECH

POS

Build Smart Solutions for Tomorrow

POS 534



IP54



Fanless



Built-in Printer



MSR



EMV Certified



2nd Display



Customer Display



Signature Design



Application Benefits :


- Easy Peripheral Connectivity
- Customer Interaction Guaranteed
- Easy Serviceability and Upgradability



Featuring Flytech's Signature aluminum base plate, the new POS 534 is designed for the trendy and savvy who are looking for a full functional POS hardware solution that connects to a variety of slim peripherals, supports rich I/O ports, built-in thermal printer, and provides protection against dust accumulation and eliminates noise emission; and to top it all, it supports a 10.1" Second Display. The POS 534 is an ideal AIO POS solution for the retail and hospitality industries.

Features

- 14"W Display with PCAP Touch
- Intel Bay Trail Processor
- IP54 Front Display
- Fanless and Silent
- Built-in Printer
- 3-Track MSR Available
- EMV Certified IC Card Reader Available
- 2nd Display and Customer Display Available
- Signature Design

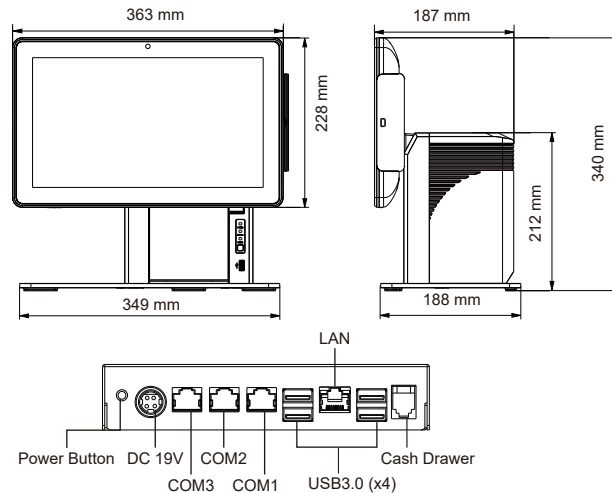

Specifications

System	Motherboard Processor Chipset System Memory Storage Device	D33 Intel Bay Trail Celeron J1900 2GHz CPU Integrated 1x DDR3L SO-DIMM up to 4GB 1x SSD module (32GB/ 64GB)
LCD Touch Panel	LCD Size Brightness Resolution Touch Screen Tilt Adjustment	14" TFT LCD 200 nits 1366 x 768 True-Flat PCAP Touch 0° ~ 90° (w/o LCM and 2nd display)
External I/O Ports	USB Serial Port LAN Cash Drawer DC Jack	4x USB3.0, 1x USB 2.0 at front 3x RJ48 (powered RS232) (default 0V; COM1,COM2 0V/5V; COM3 0V/12V) 1x RJ45 1x RJ11 (12V/24V) 1x 4 PIN DIN (with latch)
Audio	Internal Speaker	2x 2W (Option)
Control / Indicator	Printer Feed Button Printer LED Indicator	1 3 (Paper, Error, Power)
Power	Power Adapter	120W / 19V
Peripheral	Built-in Printer MSR EMV Certified Module 2nd Display Customer Display	Paper width 80mm, 170mm/sec, Auto cutter 3-Track MSR (Option) 3-Track MSR, IC Card Reader (Option) 10.1" without touch (Option) LCM display 2 x 20 characters (Option)
Certificate	EMC & Safety	FCC Class A, CE Mark Class A, LVD
Environment	Dust & Water Proof Operating Temperature Storage Temperature Humidity	IP54 Front Display 0°C ~ 35°C (32°F ~ 95°F) -20°C ~ 60°C (-4°F ~ 140°F) 20% ~ 85% RH non-condensing
Dimensions (WxDxH)		363 x 188 x 340 mm (14.3" x 7.4" x 13.4")
Weight		5 kg (11.0 lbs)
OS Supported		Windows 7, POSReady 7, Windows Embedded 8.1 Industry, Windows 10 IoT Enterprise, Linux

Taiwan - Headquarters

No.168, Sing-ai Rd., Neihu District,
Taipei City 11494, Taiwan, R.O.C.
Tel: 886-2-8791-4988
Fax: 886-2-8791-4966
E-mail: sales@flytech.com.tw
www.flytech.com

U.S.A. - California

271 East Brokaw Road, San Jose,
CA 95112, U.S.A.
Tel: 1-510-257-5180
Fax: 1-510-257-5181
E-mail: sales@flytech.com

China - Shanghai

3F Building 39, No. 333 Qin Jiang Rd.,
Shanghai 200233, P.R.China
Tel: 86-21-5426-1555
Fax: 86-21-5426-1001
E-mail: sales@flytech.com.cn
www.flytech.com.cn

China - Hong Kong SAR

Room 01, 6/F, Block A, Tonic Industrial
Centre, 26 Kai Cheung Road, Kowloon
Bay, Kowloon, Hong Kong
Tel: 852-3525-5800
Fax: 852-2751-7447
E-mail: sales@flytech.com.hk